
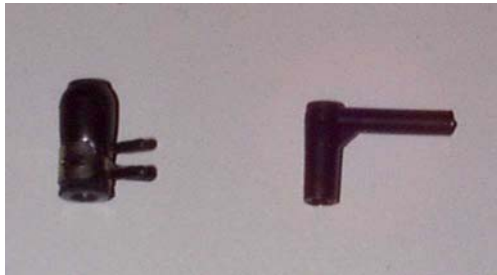


Fitting Instruction for Yamaha Fazer 600

Locate the bungs at the back of the cylinder head. Select one, remove the clip and rubber bung to reveal a spigot. Push the Scotttoiler damper elbow securely onto the spigot.

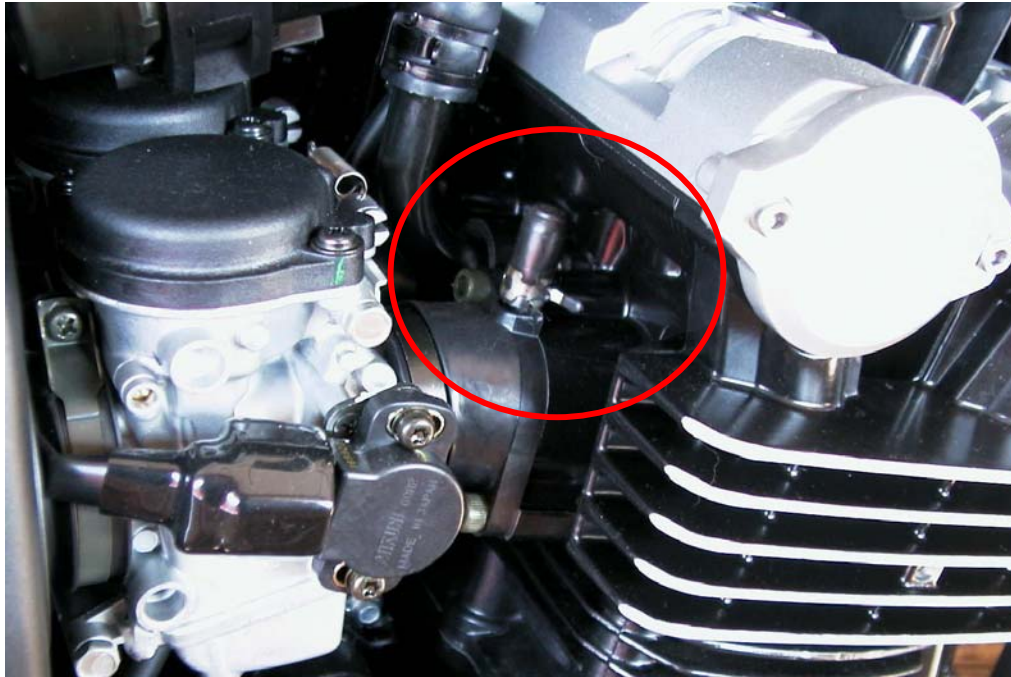


On the far left is the original Yamaha bung as circled. Remove this, and replace it with the Scotttoiler damper elbow.

The RMV can be situated under the seat, or on the frame.



If fitting the HCR, and additional brace is required for the rear mudguard on 2002 models onwards. These are available free of charge from Scotttoiler – please see last page.

Finally, mount the dispenser assembly on the swinging arm, taking care to position it correctly. Scottolier recommend using cable ties in addition to superglue.

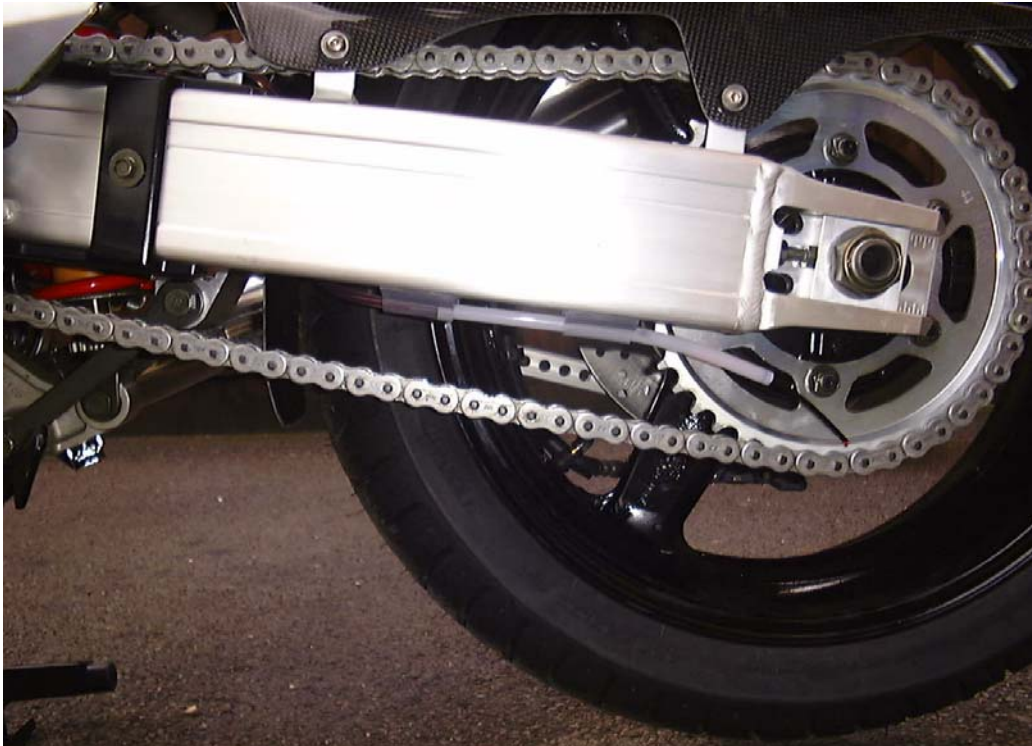


Note the end of the dispenser is cut at an angle of around 45 degrees, and that the cut faces outwards.

**Scottoiler Fitting Instruction
HCR onto Yamaha Fazer 600 2002 Model**



Fit the bracket to the mudguard using the middle hole on the bracket, and the bolt and washers as shown in the above photographs.

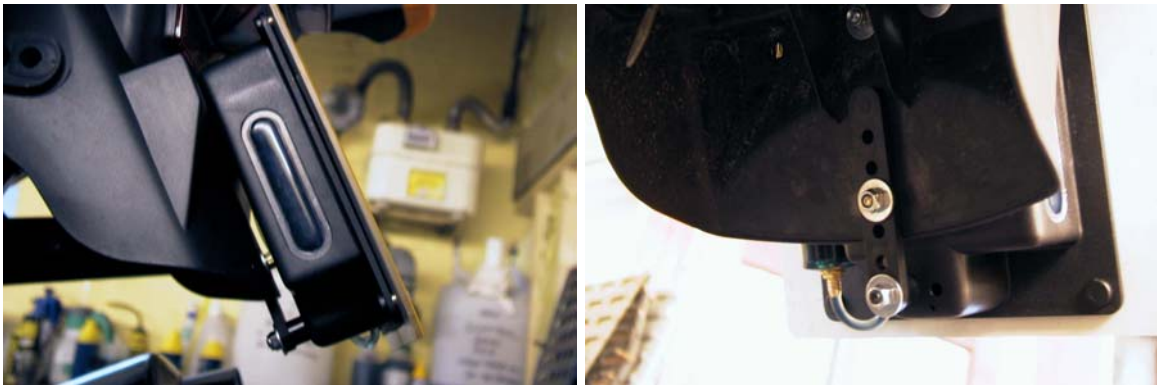

Using the 10mm spacer in the HCR Kit, bolt the Fazer bracket to the HCR as shown above.

If you have any queries or comments, or require any additional parts, please don't hesitate to contact our technical department.

Tel. 0141 955 1100 Fax. 0141 956 5896 Website. www.scottoiler.com or alternatively, email: [technical @Scottoiler.com](mailto:technical@scottoiler.com)

Finally, have you tried our **FS365 anti corrosion spray**? It's a surfactant corrosion inhibitor that can be easily sprayed all over your bike to protect it from corrosion, all year round. Its brill at getting into all the nooks and crannies and protecting your bike from rust and road salt, summer and winter.

Scottoiler Ltd. 2 Riverside, Milngavie, Glasgow, G62 6PL.